clearplus




2007-2013 **Chevrolet Silverado/GMC Sierra**

Possible Washer Nozzle Interference that may affect other aftermarket wiper blade products - NOT ClearPlus.



Both the Chevrolet Silverado and the GMC Sierra have a washer nozzle located beneath the wiper arms of both the driver side and passenger sides. Further investigation found that the clearance between the OE blade and the washer is minimal.

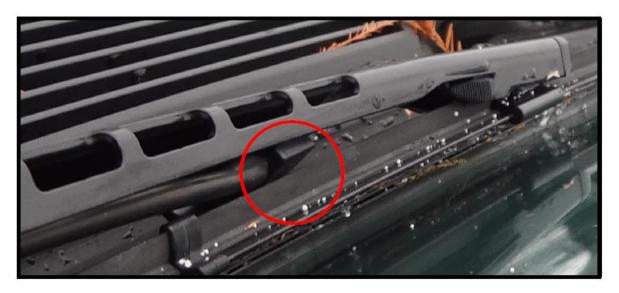

The original blade is 16.5mm high (.65 in.), measured from the bottom of the squeegee to the tip of the spoiler. The OE spoiler is located off-center to the rear of the wiper blade. Some aftermarket blades are of varying height and many have the spoiler down the middle of the blade. The different height and location vs. the OE blade may allow the spoiler to press against the washer nozzle affecting wipe quality.

ClearPlus wiper blades will not have this problem.





